


# LL4148

## Silicon Epitaxial Planar Switching Diode

Fast switching diode in MiniMELF case especially suited for automatic surface mounting

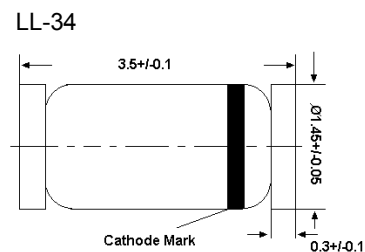


Glass case MiniMELF  
Dimensions in mm

### Absolute Maximum Ratings ( $T_a = 25\text{ }^\circ\text{C}$ )


Parameter	Symbol	Value	Unit
Peak Reverse Voltage	$V_{RM}$	100	V
Reverse Voltage	$V_R$	75	V
Average Rectified Forward Current	$I_{F(AV)}$	200	mA
Non-repetitive Peak Forward Surge Current	at $t = 1\text{ s}$	0.5	A
	at $t = 1\text{ ms}$	1	
	at $t = 1\text{ }\mu\text{s}$	4	
Power Dissipation	$P_{tot}$	500 <sup>1)</sup>	mW
Junction Temperature	$T_j$	175	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	- 65 to + 175	$^\circ\text{C}$

<sup>1)</sup> Valid provided that electrodes are kept at ambient temperature.



**SEMTECH ELECTRONICS LTD.**

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)




Dated : 15/06/2009


## Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit
Forward Voltage at $I_F = 10\text{ mA}$	$V_F$	-	1	V
Leakage Current at $V_R = 20\text{ V}$ at $V_R = 75\text{ V}$ at $V_R = 20\text{ V}, T_j = 150\text{ }^\circ\text{C}$	$I_R$ $I_R$ $I_R$	- - -	25 5 50	nA $\mu\text{A}$ $\mu\text{A}$
Reverse Breakdown Voltage tested with $100\text{ }\mu\text{A}$ Pulses	$V_{(BR)R}$	100	-	V
Capacitance at $V_R = 0, f = 1\text{ MHz}$	$C_{tot}$	-	4	pF
Voltage Rise when Switching ON tested with $50\text{ mA}$ Forward Pulses $t_p = 0.1\text{ s}$ , Rise Time $< 30\text{ ns}$ , $f_p = 5\text{ to }100\text{ KHz}$	$V_{fr}$	-	2.5	V
Reverse Recovery Time at $I_F = 10\text{ mA}$ to $I_R = 1\text{ mA}$ , $V_R = 6\text{ V}$ , $R_L = 100\text{ }\Omega$	$t_{rr}$	-	4	ns
Thermal Resistance Junction to Ambient Air	$R_{thA}$	-	$0.35^{1)}$	K/mW
Rectification Efficiency at $f = 100\text{ MHz}$ , $V_{RF} = 2\text{ V}$	$\eta_v$	0.45	-	-

<sup>1)</sup> Valid provided that electrodes are kept at ambient temperature.

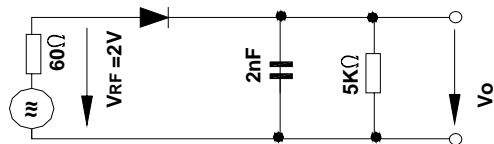


Rectification Efficiency Measurement Circuit



**SEMTECH ELECTRONICS LTD.**

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)








ISO/TS 16949 : 2002  
Certificate No. 08103

ISO 14001:2004  
Certificate No. 7116


ISO 9001:2000  
Certificate No. 0800598




BS-OHSAS 18001: 2007  
Certificate No. 7116

IECQ QC 080000  
Certificate No. 080000

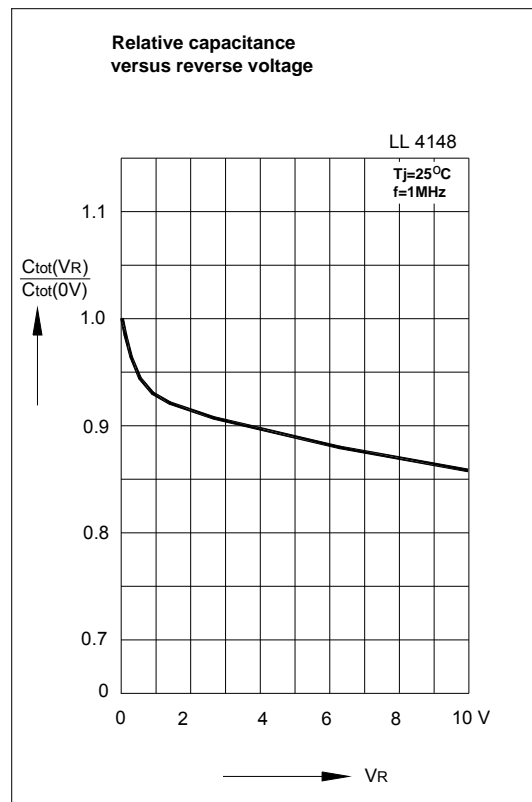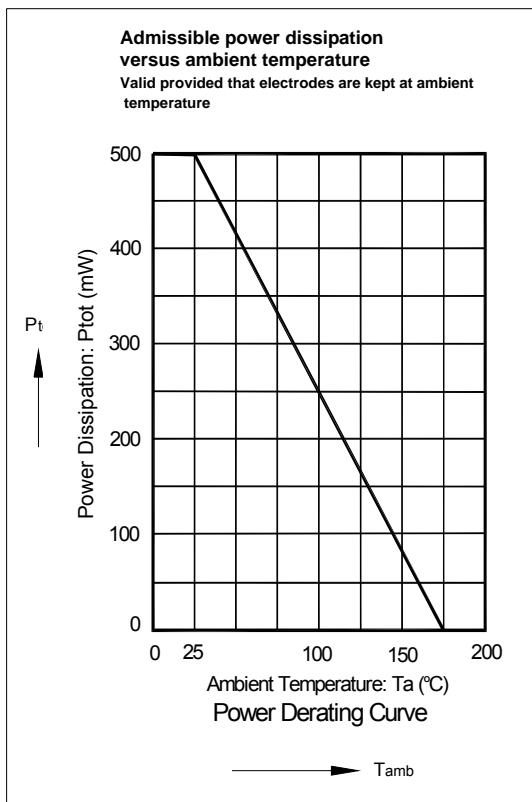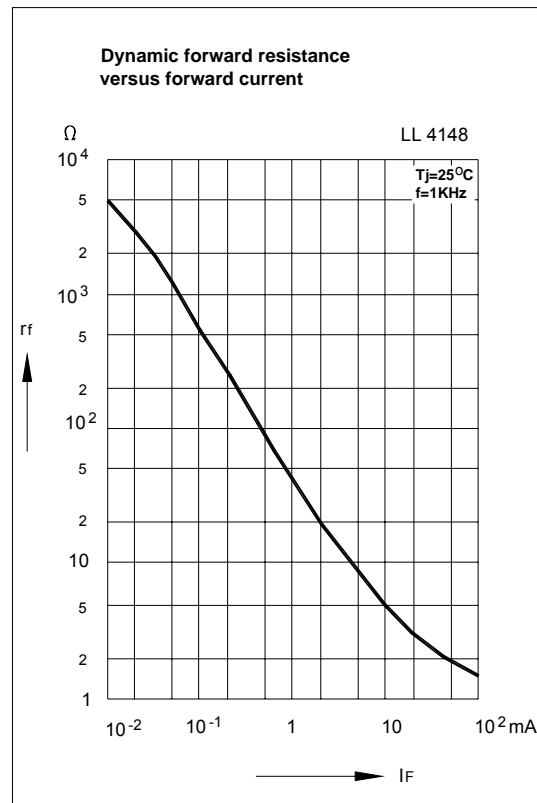
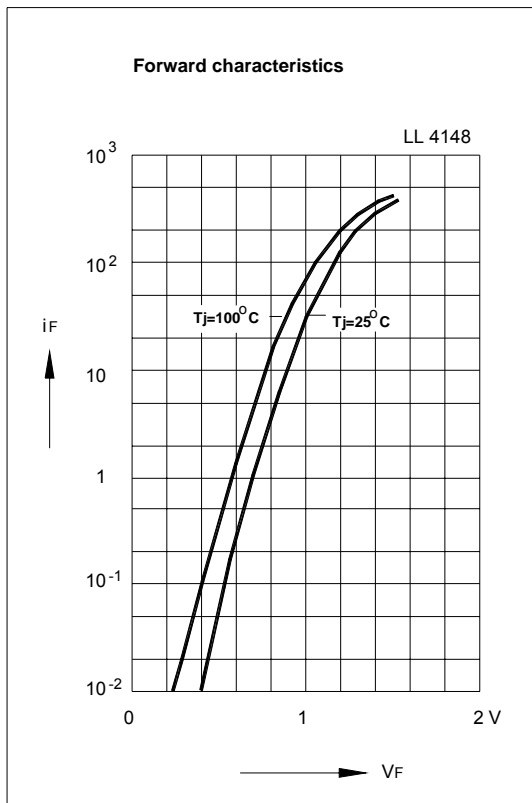


**SEMTECH ELECTRONICS LTD.**  
 (Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



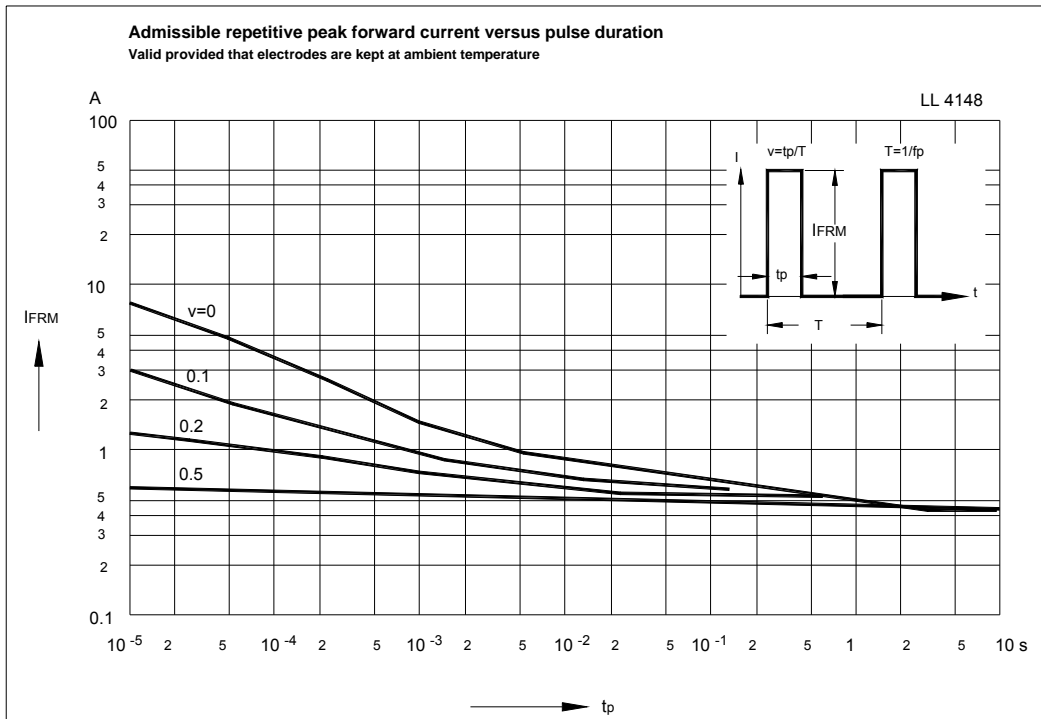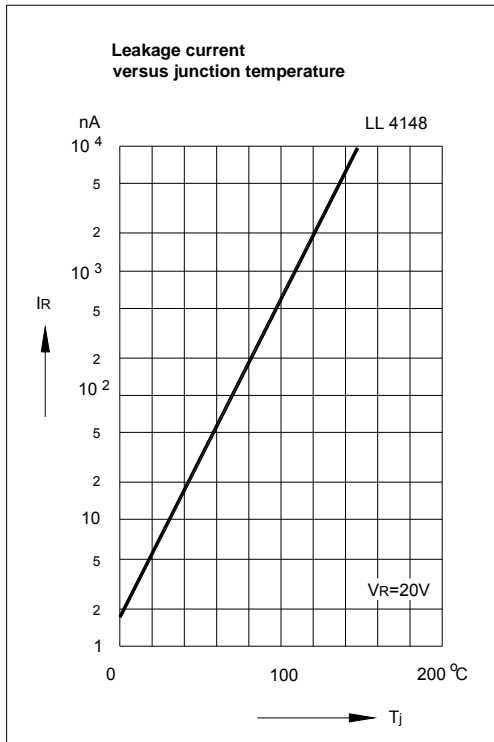

**SEMTECH ELECTRONICS LTD.**  
 (Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949:2002  
Certificate No. 08103

ISO 14001:2004  
Certificate No. 7116

ISO 9001:2000  
Certificate No. 0800598

BS-OHSAS 18001:2007  
Certificate No. 7116

IECQ QC 080000  
Certificate No. 080000